



1





2

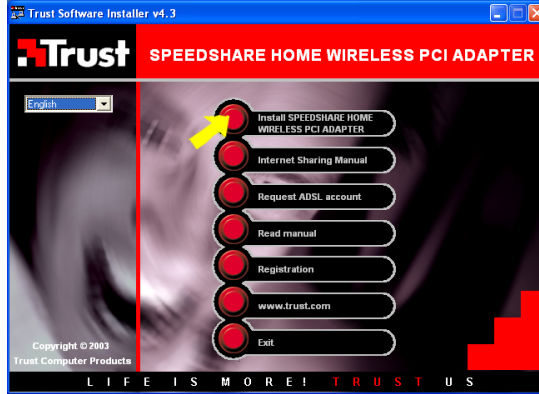


CONFIG

4

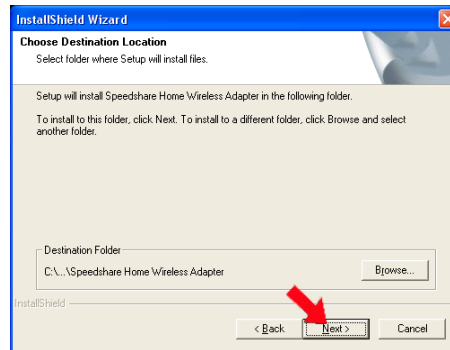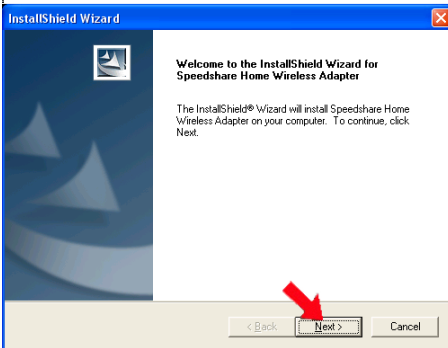

CONFIG

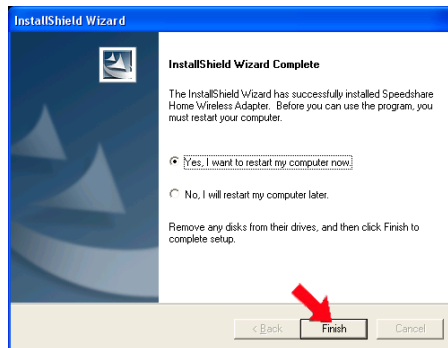

**5**

POWER OFF

OPEN

**6**

**7**

CLOSE

POWER ON

**8**

**Windows 2000 / XP:**


**Windows XP:**

Description	Version	Manufacturer	Locatio
Speedshare Home Wireless PCI Adapter	3.0.0.1	e\wind	
Speedshare Home Wireless PCI Adapter	3.0.0.1	h\drive	
Speedshare Home Wireless PCI Adapter	3.0.0.1	h\drive	
Speedshare Home Wireless PCI Adapter	3.0.0.1	h\drive	


**CONFIG**

9

### Windows 2000 (2X):

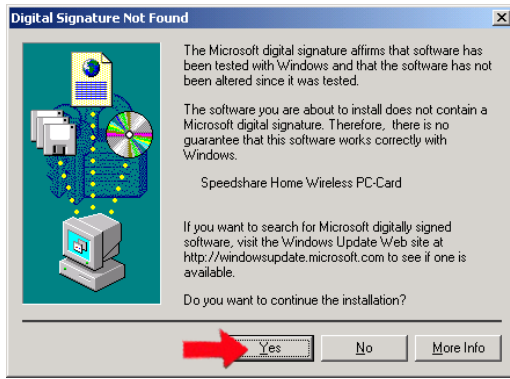


### Windows XP:

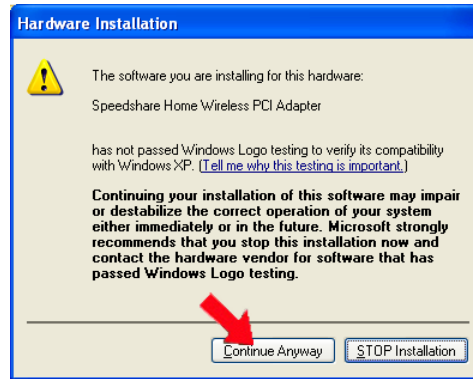

CONFIG

10

### Windows 2000 / XP:

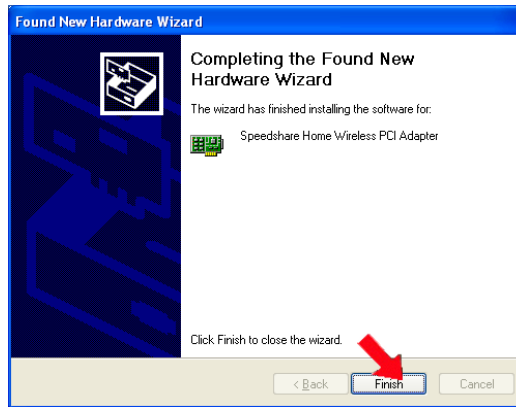

CONFIG

11


### Windows 98 / Me/ 2000 / XP:



CONFIG

12


### Windows XP:

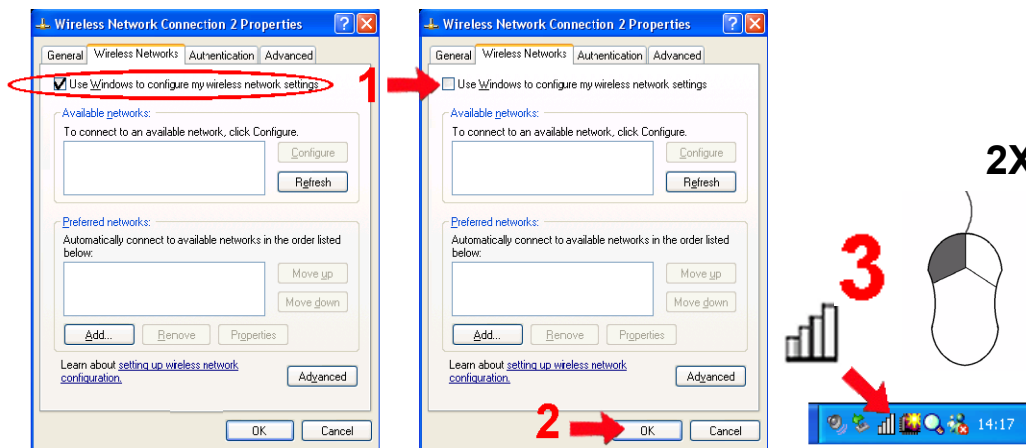

CONFIG

13


- Configuration (17)
- Encryption (18)
- SiteSurvey (14)

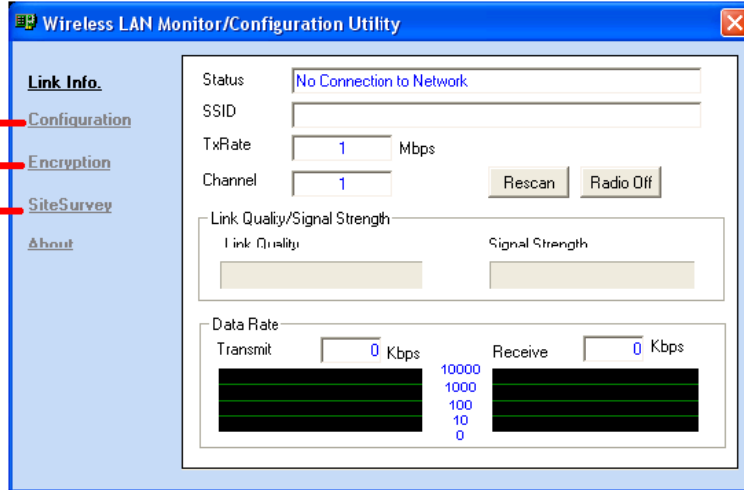

CONFIG

14

**SiteSurvey**

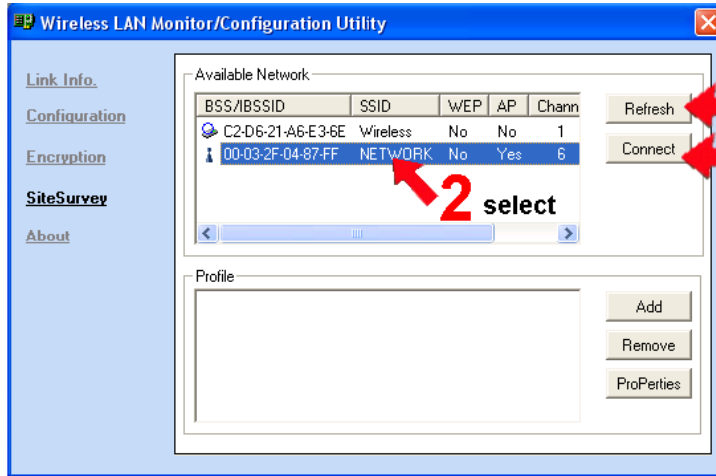


1 Refresh

3 Connect

2 select


CONFIG

15

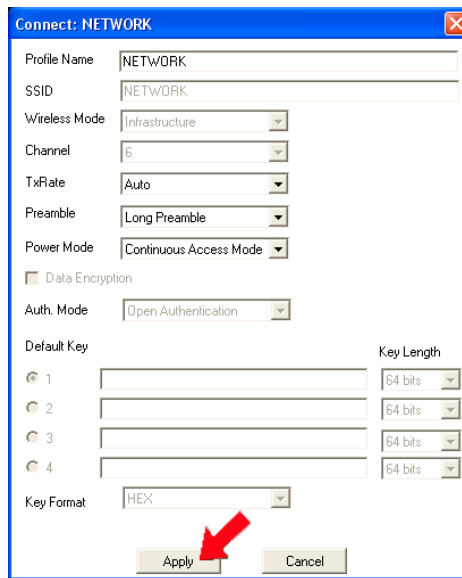

CONFIG


16

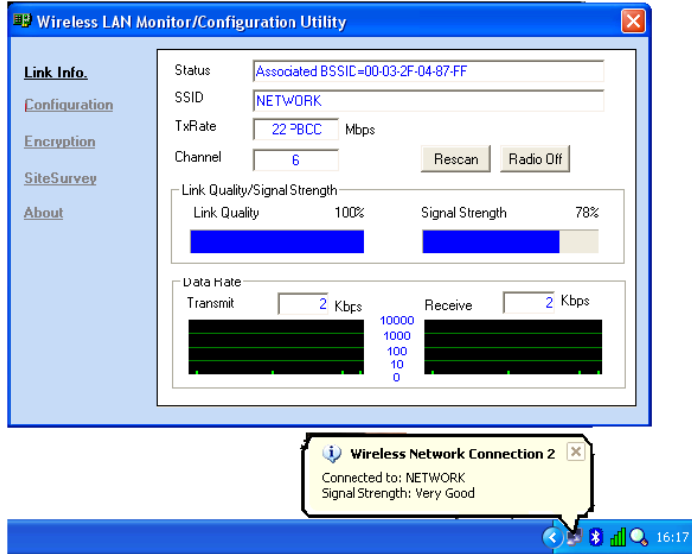

CONFIG

## Configuration

17

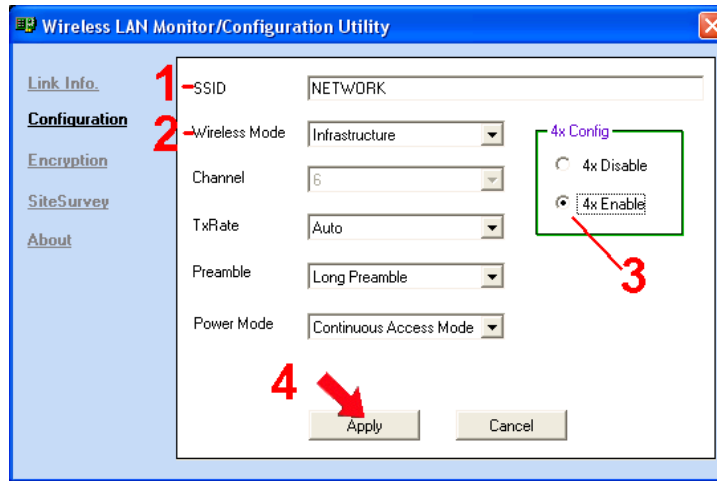


CONFIG

- 1 = SSID : Network name
- 2 = Wireless Mode : Infrastructure = Networks (20A)  
Ad-Hoc = computer -> computer (20B)
- 3 = 4x Config : 4x Disable = 22Mbps  
4x Enable = 44Mbps

## Encryption

18

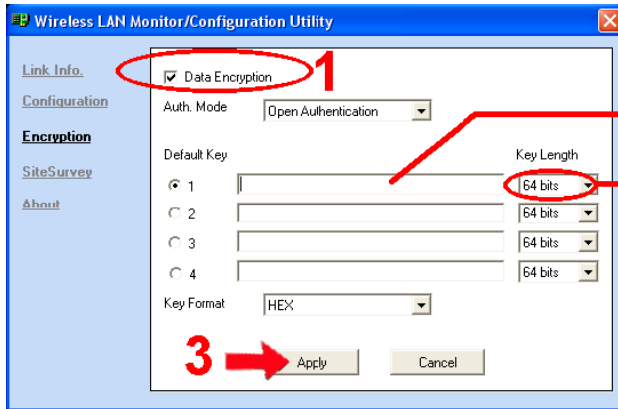


Keycode = Keycode SSID network

Key Length:  
64 bits = 10 characters  
128 bits = 16 characters  
256 bits = 58 characters

CONFIG


19

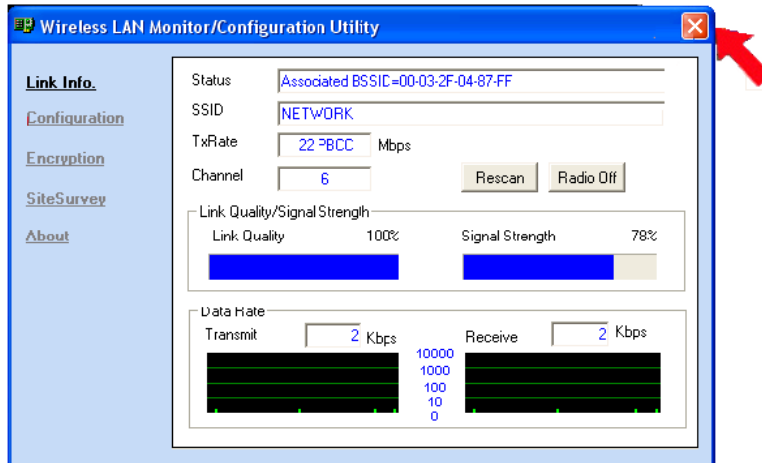


CONFIG

20

### Infrastructure (A)

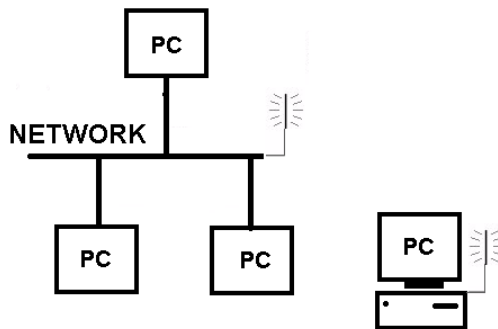

### Ad-hoc (B)



Finish

